


ENERGIZER 528

6V



Industry Standard Dimensions

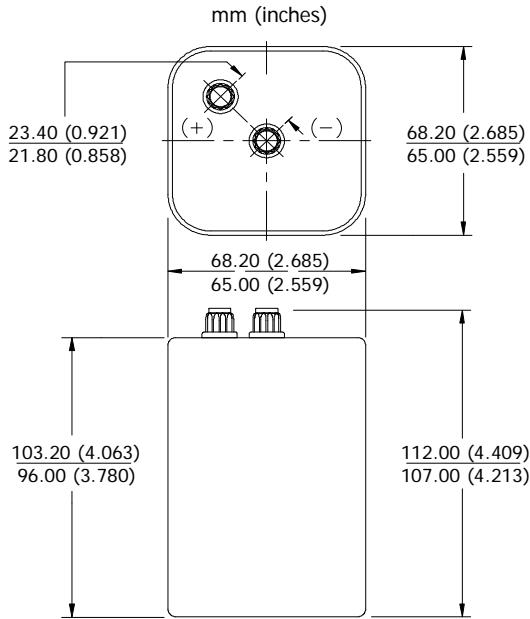


This battery shall pass freely through a cylindrical tube 82.6 (3.250) diameter

Specifications



- Classification:** Alkaline
- Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂)
No added mercury or cadmium
- Designation:** ANSI-908A, IEC-4R25Y
- Nominal Voltage:** 6.0 volts
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Typical Weight:** 885 grams (31.3 oz.)
- Typical Volume:** 440.4 cubic centimeters (26.9 cubic inch)
- Jacket:** Metal
- Cells:** Four 3-361 in series
- Terminal:** Screw Post

Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

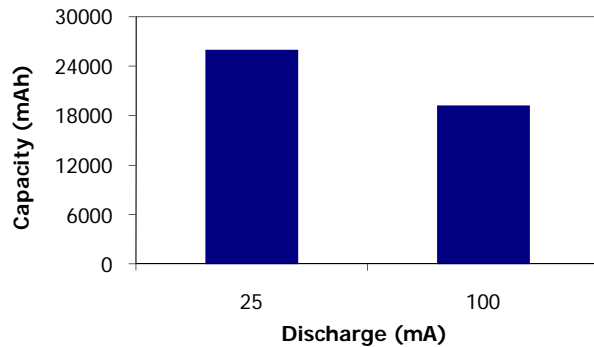

Industry Standard Tests (21°C)

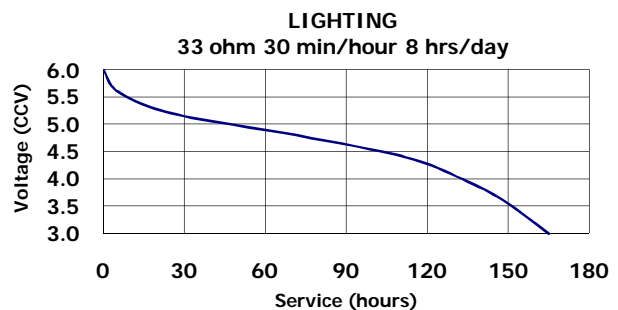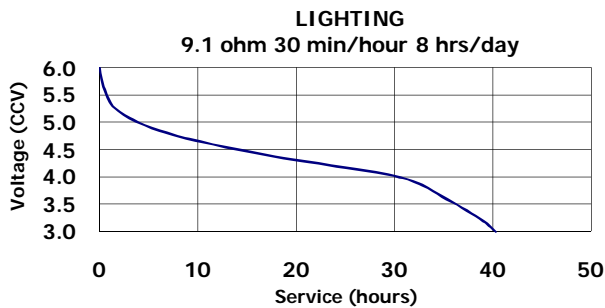

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.