

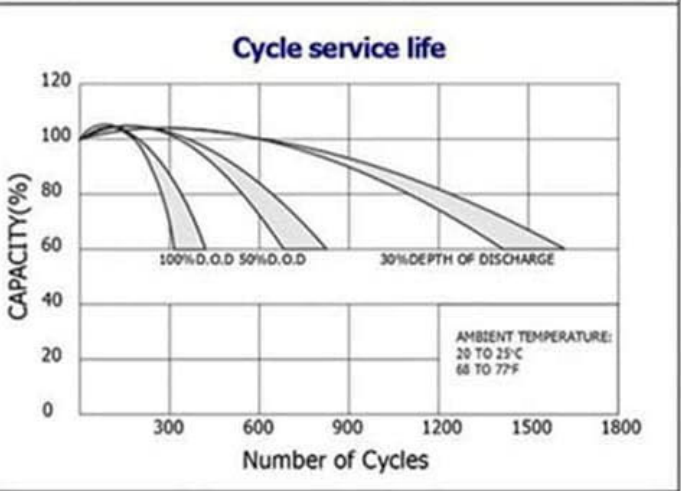
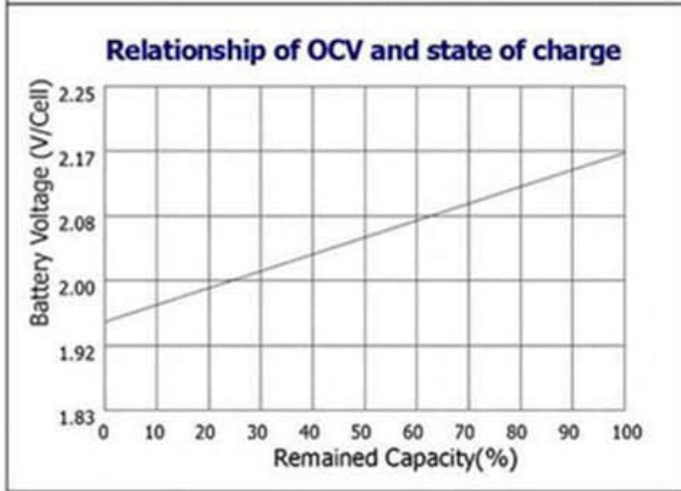


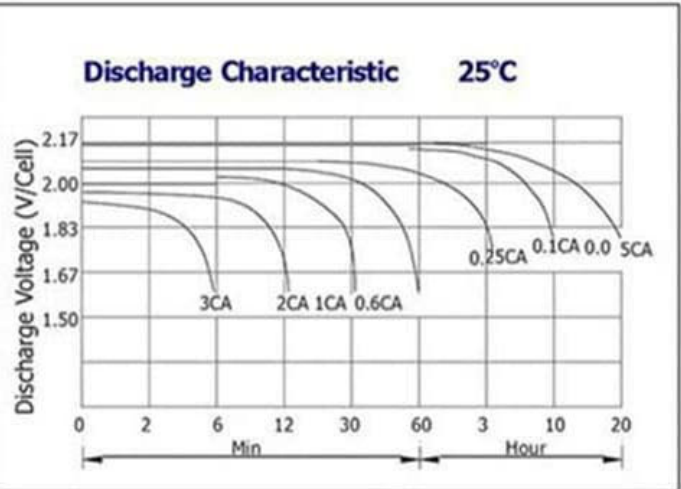

ML22-12 GEL 12V22Ah/20hr

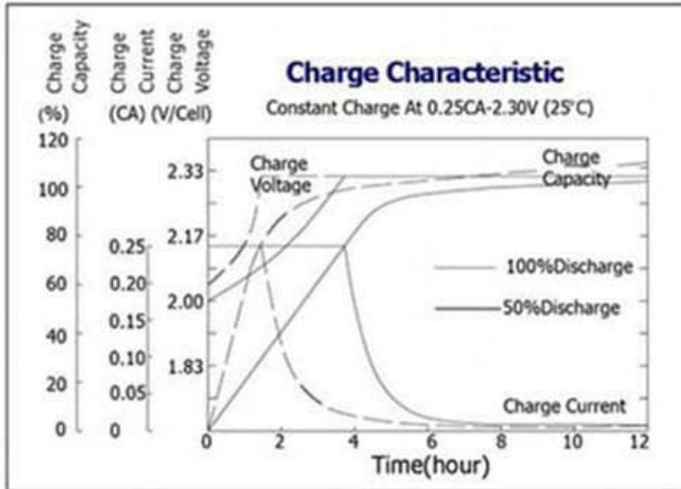

Constant current discharge ratings-amperes at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	66.4	41.3	31.2	19.0	12.1	5.30	3.24	1.81	0.95
1.67V	62.3	39.2	30.0	18.2	11.9	5.10	3.17	1.80	0.92
1.70V	57.1	37.8	29.3	16.5	11.6	4.76	3.11	1.79	0.91
1.75V	56.0	36.6	28.3	15.7	11.0	4.60	3.04	1.76	0.88
1.80V	50.1	34.9	25.7	14.5	10.3	4.42	2.86	1.74	0.86
1.85V	44.2	33.3	23.1	13.4	9.61	4.26	2.67	1.72	0.83

Constant power discharge ratings-watts at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	117	74.6	56.9	34.2	21.8	9.41	5.48	3.63	1.90
1.67V	112	72.7	56.2	33.5	21.7	9.11	5.45	3.60	1.84
1.70V	106	72.0	55.7	31.4	21.3	8.70	5.38	3.58	1.81
1.75V	107	71.8	55.3	30.5	20.9	8.50	5.34	3.54	1.77
1.80V	97.5	70.7	51.2	29.0	19.7	8.25	5.17	3.49	1.72
1.85V	88.4	67.1	46.5	27.2	18.5	8.00	5.01	3.45	1.65



ML22-12 GEL 12V22Ah/20hr

Gel Series

Gel series batteries are designed to meet the requirements of frequent cyclic and high temperature applications such as broadband, PVs etc through up-to-date gel technologies. BSB Gel batteries uses German origin high purity fumed silica to form sulfuric acid thixotropic Gel and fills to the batteries with vacuum to ensure the fully penetration of electrolyte through separators and plates pastes.



Application

- Alarm System
- Cable Television
- Communication Equipment
- Control Equipment
- Security System
- Medical Equipment
- UPS
- Power tools
- Emergency Power System
- Toys




General Features

- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy Resin
- Safety valveEPDR
- TerminalCopper
- SeparatorMacromolecule polymer
- Electrolytesulfuric acid thixotropic Gel

Terminal (F13)

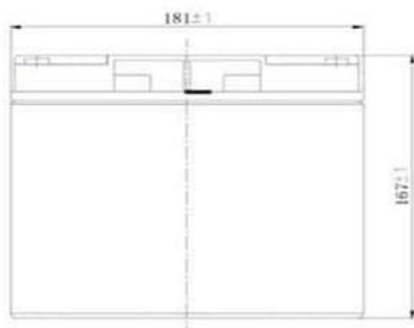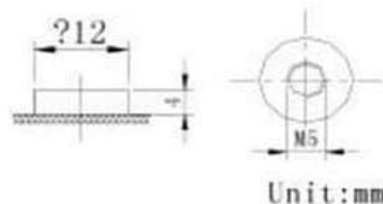

Battery Model	ML22-12 GEL			
Designed Life	8 Years (Floating) or > 750 Cycles @ 50% D.O.D			
Capacity(25°C)	20HR(1.1A,1.75V)	10HR(2.0A,1.75V)	5HR(2.89A,1.75V)	1HR(11A,1.75V)
	22AH	20AH	14.5AH	11AH
Dimensions	Length	Width	Height	Total Height
	181mm(7.13inch)	76mm(2.99inch)	167mm(6.57inch)	167mm(6.57inch)
Approx. Weight	5.9Kg (12.98 lbs)			
Internal Resistance	Full charged at 25°C: 0.014 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/ °C), max. Current: 6.6A		13.6-13.8V(-20mV/ °C)	